



## 1N4148WT SURFACE MOUNT SWITCHING DIODE

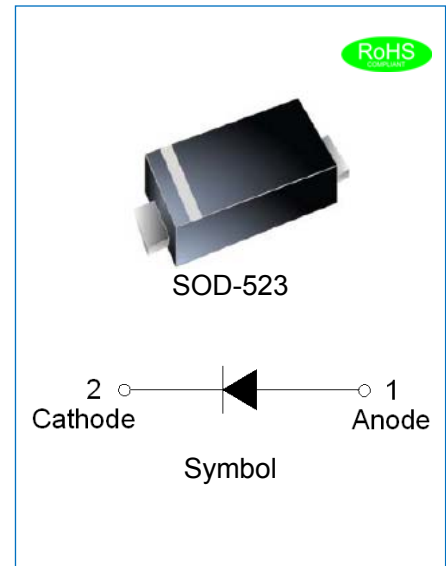
Rev.1.4

### FEATURES

- ✧ Fast Switching Speed
- ✧ Surface Mount Package Ideally Suited for Automatic Insertion
- ✧ For Surface Mounted Applications
- ✧ RoHS compliant/Green EMC
- ✧ For General Purpose Switching Applications
- ✧ High Conductance

### MECHANICAL DATA

- ✧ Case: SOD-523 Molded Plastic
- ✧ Polarity: Color Band Denotes Cathode End
- ✧ Weight: 0.002grams(approx.)
- ✧ Type Code: T4



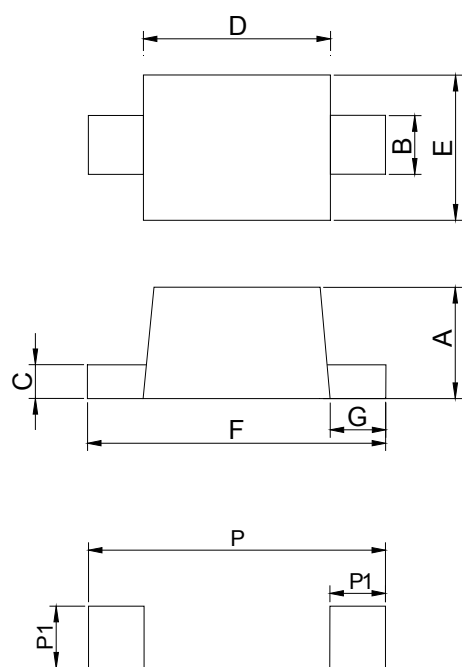
### ABSOLUTE MAXIMUM RATING CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified.)

Parameter	Symbol	1N4148WT	Unit
Continuous Reverse Voltage	$V_R$	75	V
Peak Repetitive Reverse Voltage	$V_{RM}$	100	V
Average Rectified Output Current at $T_A=25^\circ\text{C}$	$I_O$	150	mA
Peak Forward Current	$I_{FM}$	300	mA
Non-Repetitive Forward Surge Current at $t_P=1\text{s}$	$I_{FSM}$	1	A
Power Dissipation at $T_A=25^\circ\text{C}$	$P_D$	200	mW
Thermal Resistance (Junction to Ambient)	$R_{\theta JA}$	625	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	$T_j$	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +150	$^\circ\text{C}$

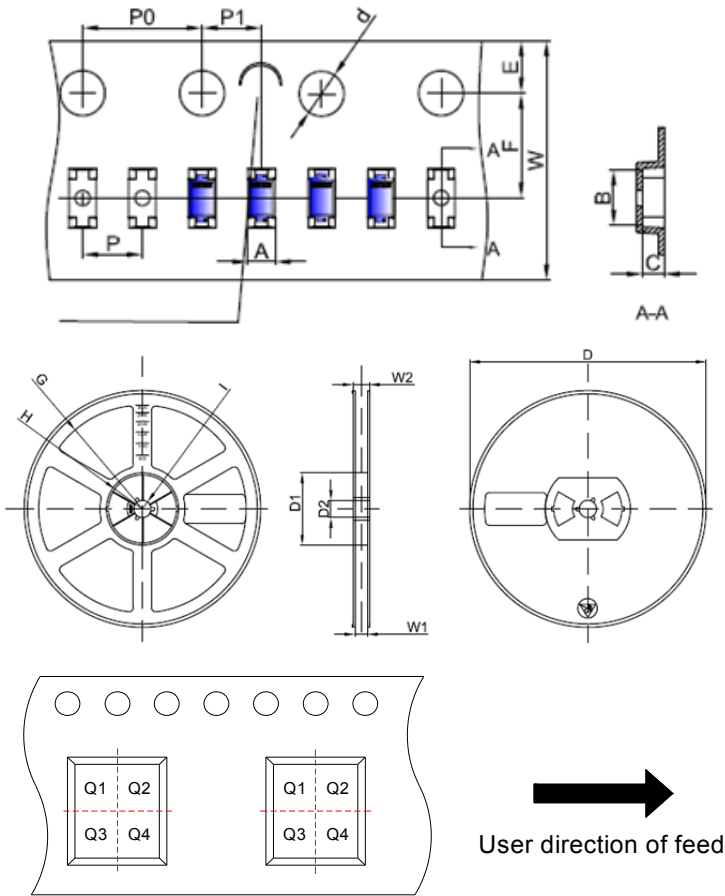
**ELECTRICAL CHARACTERISTICS**(Rating at 25°C ambient temperature unless otherwise specified.)

Symbol	Parameter	Conditions	Value			Unit
			Min.	Typ.	Max.	
V <sub>F</sub>	Forward Voltage	I <sub>F</sub> =5mA	-	-	0.715	V
		I <sub>F</sub> =10mA	-	-	0.855	V
		I <sub>F</sub> =100mA	-	-	1.0	V
		I <sub>F</sub> =150mA	-	-	1.25	V
I <sub>R</sub>	Reverse Current	V <sub>R</sub> =75V, T <sub>j</sub> =25°C	-	-	1	μA
		V <sub>R</sub> =20V, T <sub>j</sub> =25°C	-	-	25	nA
		V <sub>R</sub> =75V, T <sub>j</sub> =150°C	-	-	50	μA
C <sub>T</sub>	Capacitance	V <sub>R</sub> =0V, f=1MHz	-	-	2	pF
T <sub>rr</sub>	Reverse Recovery Time	I <sub>F</sub> =I <sub>R</sub> =10mA I <sub>RR</sub> =1mA, R <sub>L</sub> =100Ω	-	-	4	ns

**PACKAGE MECHANICAL DATA**

**Land Pattern**

Symbol	Millimeters			Inches		
	Min	Typ	Max	Min	Typ	Max
A	0.50	0.61	0.77	0.020	0.024	0.030
B	0.25	0.30	0.40	0.010	0.012	0.016
C	0.07	0.13	0.20	0.003	0.005	0.008
D	1.10	1.20	1.30	0.043	0.047	0.051
E	0.70	0.80	0.90	0.028	0.031	0.035
F	1.50	1.60	1.70	0.059	0.063	0.067
G	0.15	0.20	0.25	0.006	0.008	0.010
P1	0.60			0.024		
P	1.42			0.056		

TAPE AND REEL SPECIFICATION-SOD-523



Pin 1 quadrant:Q1&Q2

Packaging Description:

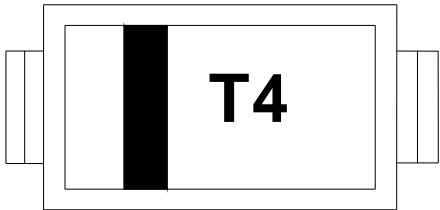
SOD-523 parts are shipped in tape. The carrier tape is made from a dissipative(carbon filled) polycarbonate resin. The cover tape is a multilayer film(heat activated adhesive in nature)primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 5,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and made of polystyrene plastic(anti-static coated).

Symbol	Millimeters	Inches
	Typ.	Typ.
A	0.95	0.037
B	1.92	0.076
C	0.73	0.029
d	Φ1.50	Φ0.059
E	1.75	0.069
F	3.50	0.138
P0	4.00	0.157
P	2.00	0.079
P1	2.00	0.079
W	8.00	0.315
D	Φ178	Φ7.008
D1	54.40	2.142
D2	13.00	0.512
G	R78.00	R3.071
H	R25.60	R1.008
I	R6.50	R0.256
W1	9.50	0.374
W2	12.30	0.484

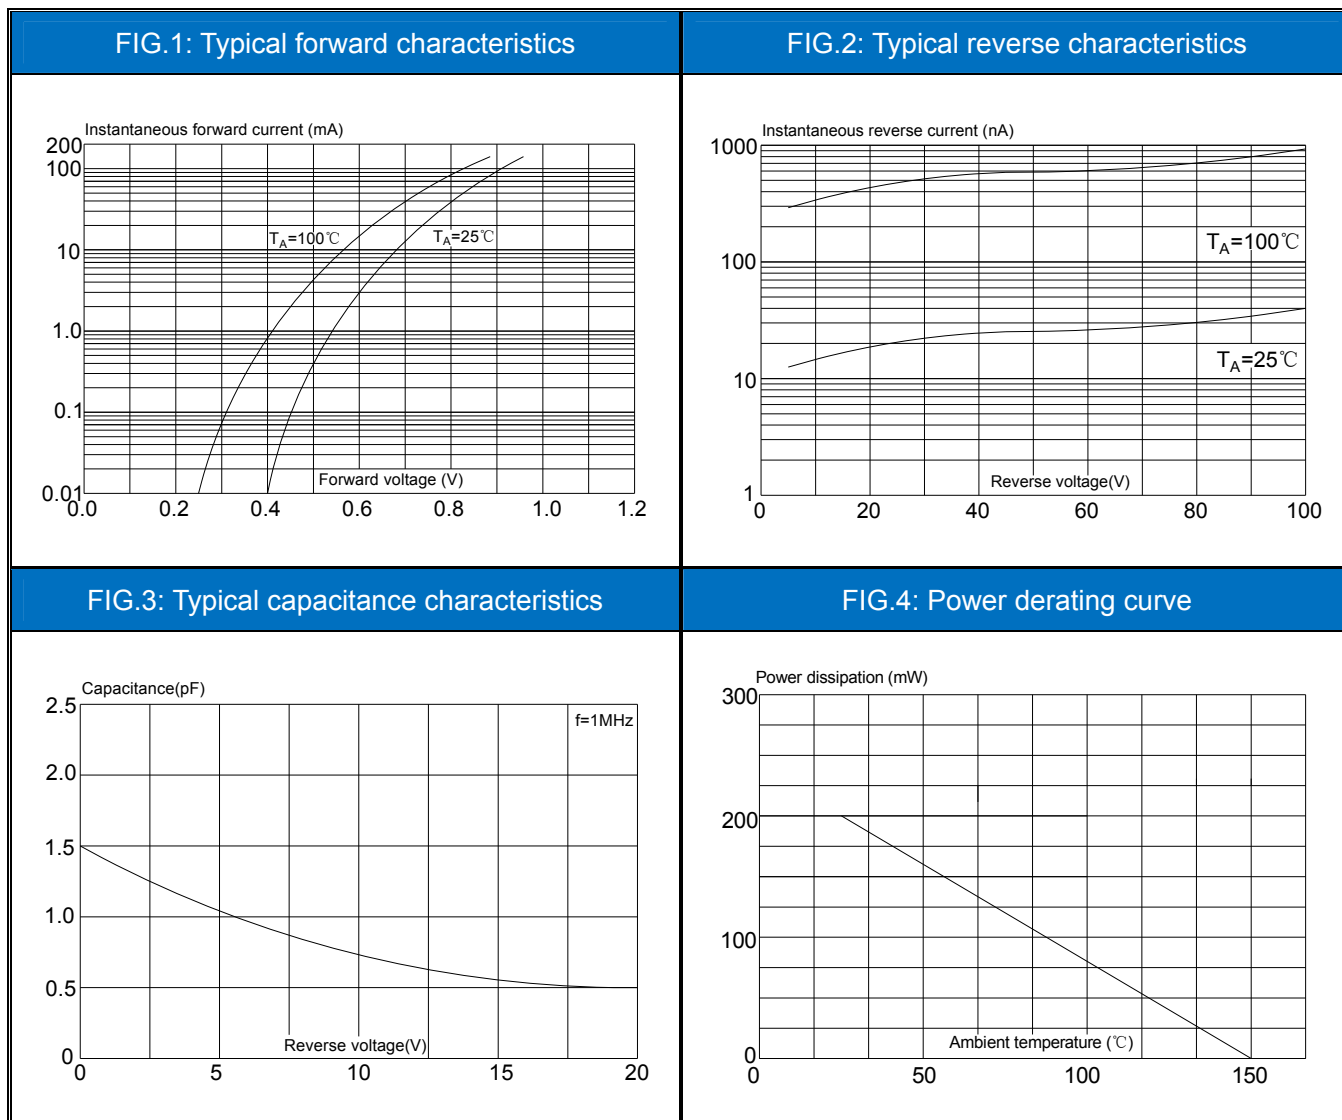
ORDERING INFORMATION

PART No.	PACKAGE TYPE	QUANTITY(PCS) REEL	DESCRIPTION
1N4148WT	SOD-523	5,000	7 inch reel pack

MARKING CODE

Part Number	Marking Code
1N4148WT	

CHARACTERISTICS CURVE




Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 1.4th version which is made in 21-Jan.-2022. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2022 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.