



BAS21

SURFACE MOUNT SWITCHING DIODE


Rev.1.1

FEATURES

- ✧ Fast Switching Speed
- ✧ Surface Mount Package Ideally Suited for Automatic Insertion
- ✧ For Surface Mounted Applications
- ✧ RoHS Compliant/Green EMC
- ✧ For General Purpose Switching Applications
- ✧ High Conductance

MECHANICAL DATA

- ✧ Case: SOT-23, Plastic
- ✧ Polarity: Cathode Band
- ✧ Weight: 0.004grams(approx.)
- ✧ Quantity Per Reel:3,000pcs
- ✧ Type Code: JS

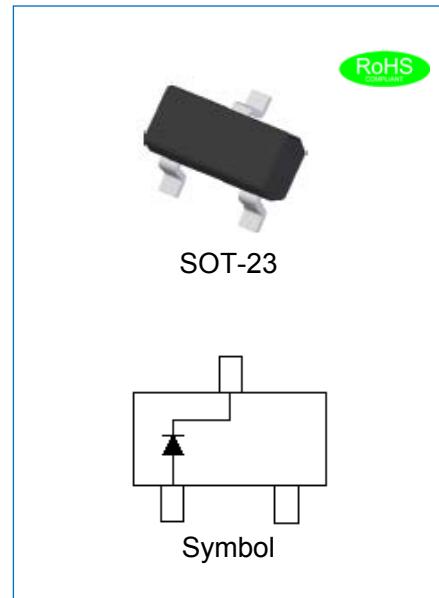

ABSOLUTE MAXIMUM RATING CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified.)


Parameter	Symbol	BAS21	Unit
Continuous Reverse Voltage	V_R	200	V
Peak Repetitive Reverse Voltage	V_{RM}	250	V
Forward DC Current at $T_A=25^\circ\text{C}$	I_F	200	mA
Average Rectified Forward Current at $T_A=25^\circ\text{C}$	$I_{F(AV)}$	200	mA
Non-Repetitive Forward Surge Current <small>$t_P=1\mu\text{s}$</small>	I_{FSM}	2.5	A
		0.5	
Power Dissipation at $T_A=25^\circ\text{C}$	P_D	250	mW
Thermal Resistance (Junction to Ambient)	$R_{\theta JA}$	500	°C/W
Operating Junction Temperature Range	T_j	-55 to +150	°C
Storage Temperature Range	T_{stg}	-55 to +150	°C

ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified.)


Symbol	Parameter	Conditions	Value			Unit
			Min.	Typ.	Max.	
$V_{(BR)R}$	Breakdown Voltage	$I_R=100\mu A$	250	-	-	V
V_F	Forward Voltage	$I_F=100mA$	-	-	1.0	V
		$I_F=200mA$	-	-	1.25	V
I_R	Reverse Current	$V_R=200V, T_j=25^\circ C$	-	-	100	nA
		$V_R=200V, T_j=150^\circ C$	-	-	100	μA
C_T	Capacitance	$V_R=0V, f=1MHz$	-	-	5	pF
Tr	Reverse Recovery Time	$I_F=30mA, I_R=30mA$ $I_{RR}=3mA, R_L=100\Omega$	-	-	50	ns

PACKAGE MECHANICAL DATA

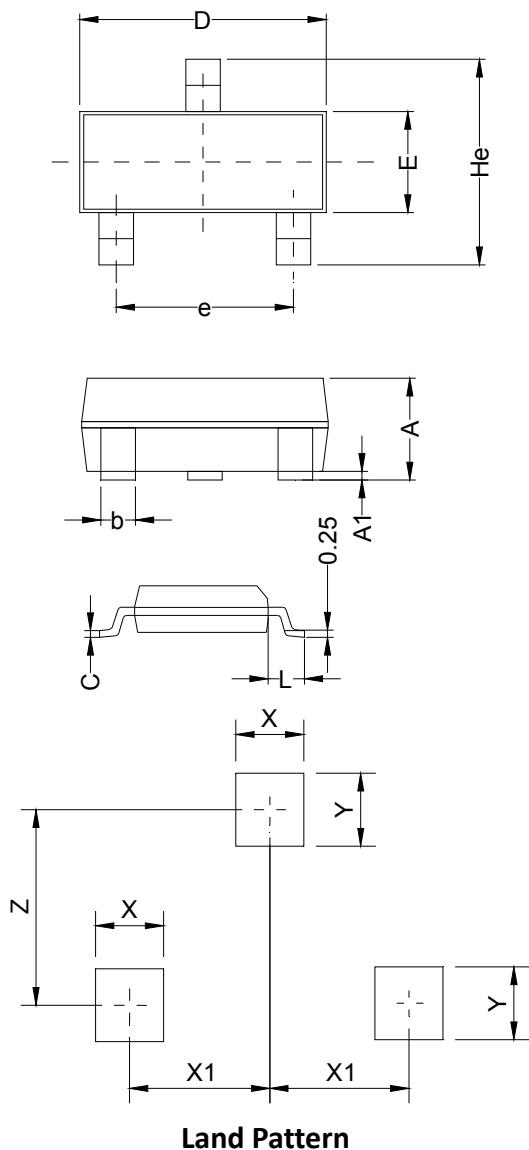

Symbol	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.90	1.063	1.15	0.035	0.042	0.045
A1	0.00	0.075	0.14	0.000	0.003	0.006
b	0.30	0.40	0.50	0.012	0.016	0.020
C	0.07	0.10	0.15	0.003	0.004	0.006
D	2.80	2.90	3.00	0.110	0.114	0.118
e	1.80	1.90	2.00	0.071	0.075	0.079
E	1.20	1.30	1.40	0.047	0.051	0.055
L	0.55REF			0.022REF		
He	2.25	2.40	2.55	0.089	0.094	0.100
X	0.80			0.031		
X1	0.95			0.037		
Y	0.80			0.031		
Z	2.02			0.080		

TAPE AND REEL SPECIFICATION-SOT-23

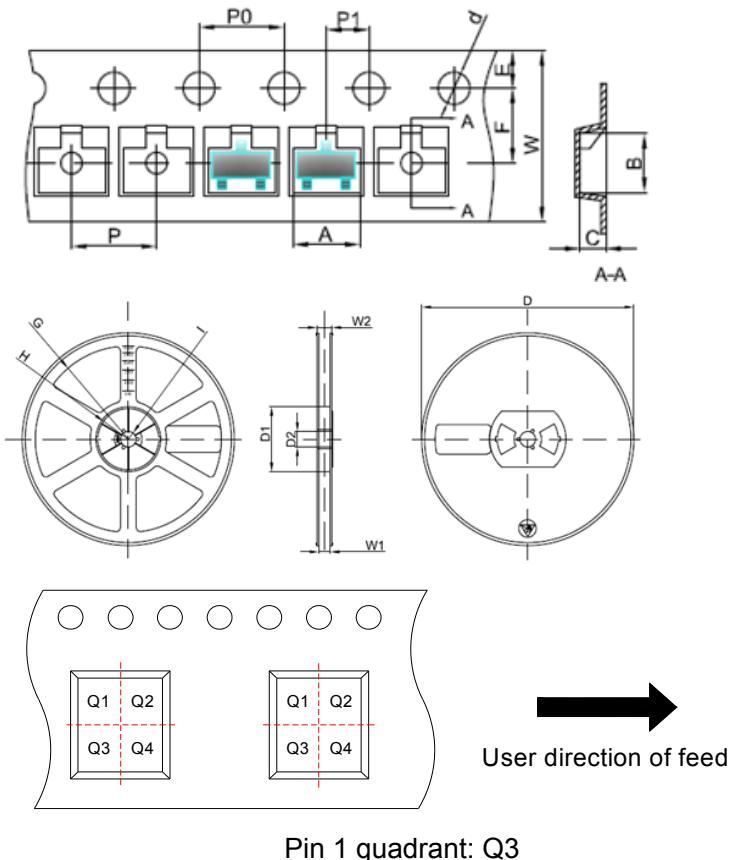

Packaging Description:


SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative(carbon filled) polycarbonate resin. The cover tape is a multilayer film(heat activated adhesive in nature)primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000units per 7" or 17.8cm diameter reel. The reels are clear in color and made of polystyrene plastic(anti-static coated).

Symbol	Millimeters	Inches
	Typ.	Typ.
A	3.15	0.124
B	2.77	0.109
C	1.22	0.048
d	$\Phi 1.50$	$\Phi 0.059$
E	1.75	0.069
F	3.50	0.138
P0	4.00	0.157
P	4.00	0.157
P1	2.00	0.079
W	8.00	0.315
D	$\Phi 178$	$\Phi 7.008$
D1	54.40	2.142
D2	13.00	0.512
G	R78.00	R3.071
H	R25.60	R1.008
I	R6.50	R0.256
W1	9.50	0.374
W2	12.30	0.484

ORDERING INFORMATION

OUTLINE	UNIT WEIGHT (g/PCS) typ.	PACKAGE TYPE	QUANTITY REEL	DESCRIPTION
TAPING	0.004	SOT-23	3,000	7 inch reel pack

MARKING CODE

Part Number	Marking Code
BAS21	

CHARACTERISTICS CURVE

FIG.1: Typical forward characteristics

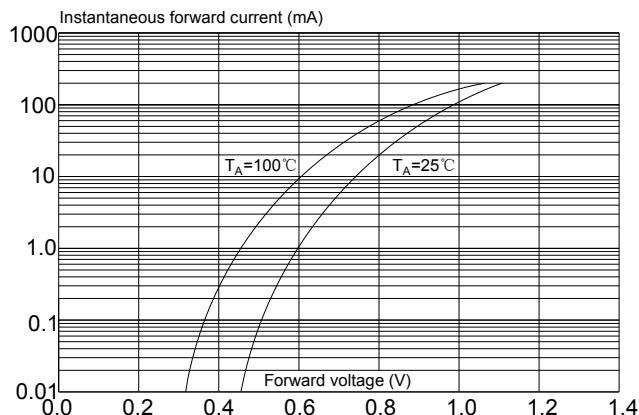


FIG.2: Typical reverse characteristics

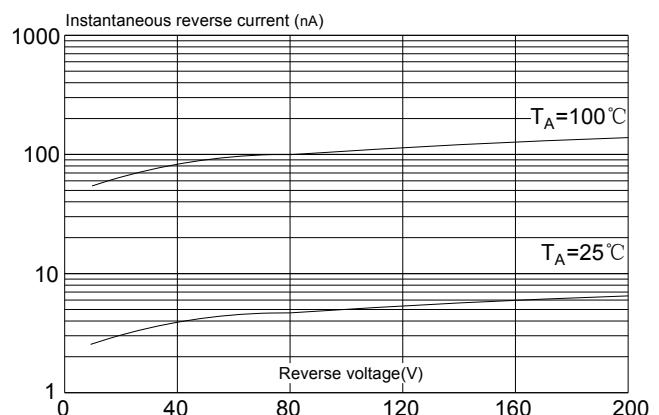


FIG.3: Typical capacitance characteristics


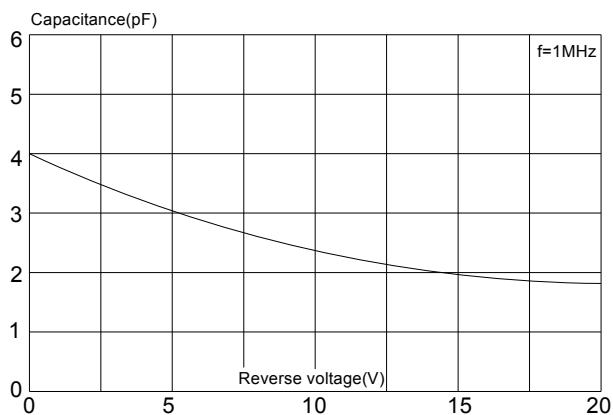


FIG.4: Power derating curve

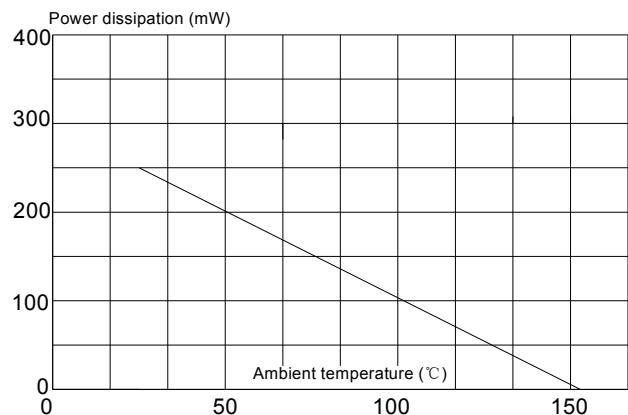

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 1.1st version which is made in 17-Dec.-2020. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2020 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.